


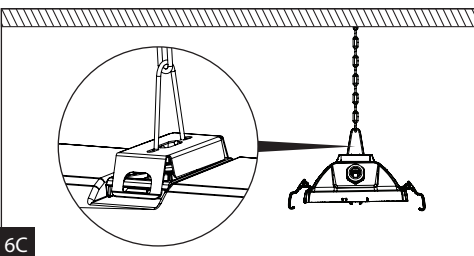
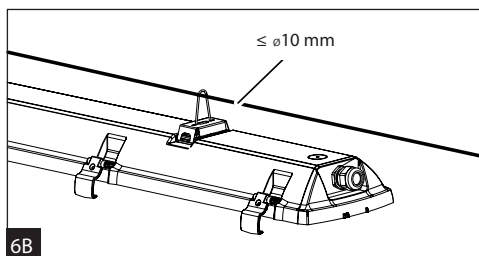
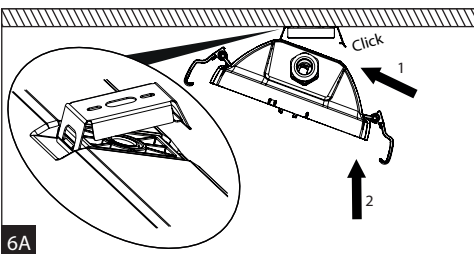
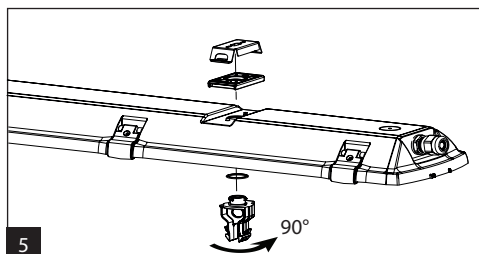
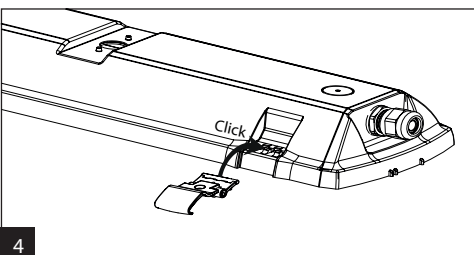
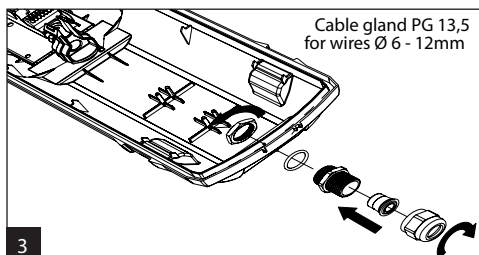
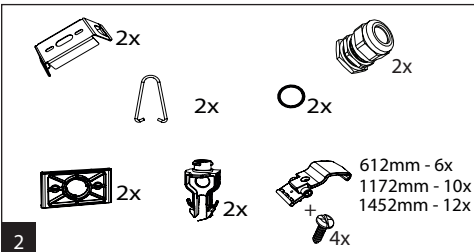
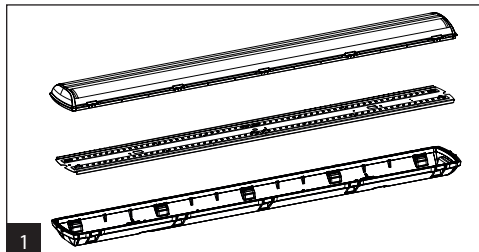
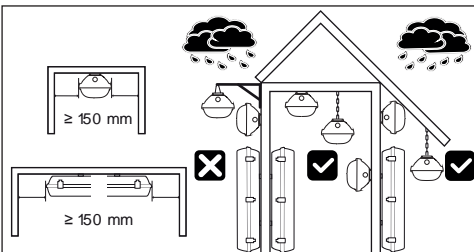
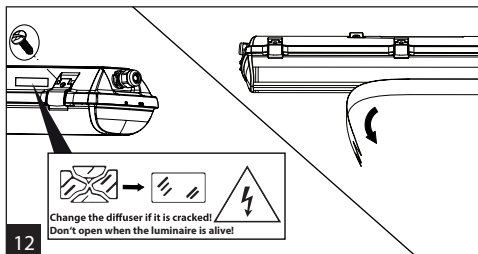
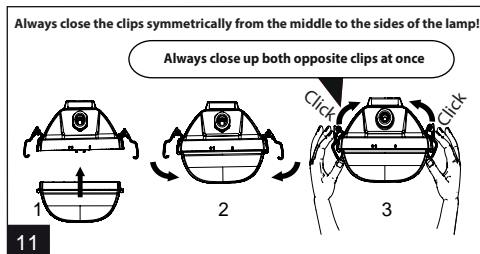
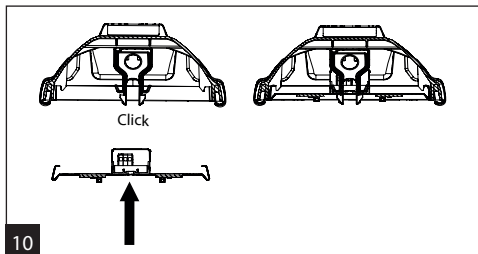


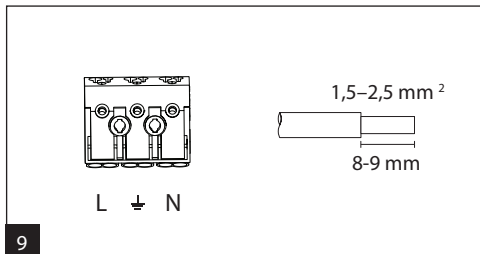

A [mm]	D [mm]
612	475
1172	700
1452	940

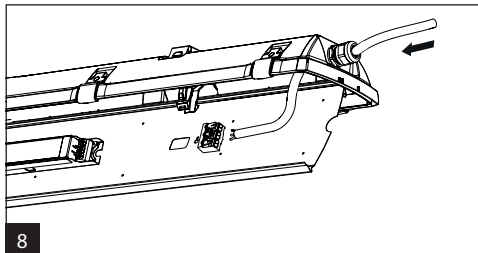

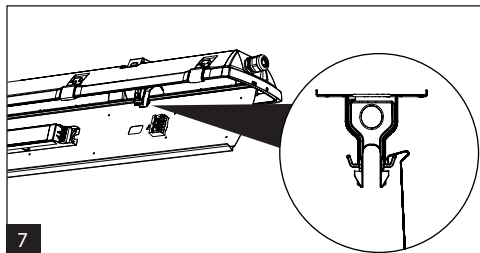

Installation can only be carried out by an authorized person and according to the mounting instructions. Any other installation is considered to be improper. For well installation and good luminaire work is necessary ensure a planarity of a mounting surface. Make sure that the luminaire is always disconnected from the power supply before the installation work. Do not use the luminaire if damaged or if damaged the power cable. Only damp microfiber cloth can be used for cleaning, technical changes are subjected without notice. Do not dispose the luminaire or its parts as household waste, but make the proper recycling.

Table of maximal number of luminaires in one line				10A B	16A B	10A C	16A C
Length	Σ1m	Σ1m	Σ1m	luminaires	luminaires	luminaires	luminaires
612mm	2600			32	50	52	85
612mm	3200	4400		10	16	16	26
1172mm	5200	6400	8800	10	16	16	26
1172mm		12800		11	18	18	30
1452mm	6500	8000	11000	10	16	16	26
1452mm	116000			11	18	18	30

The light source in this luminaire may be replaced only by the manufacturer or its contractual service technician or similarly qualified person!

## MC030S E ON-OFF Function / Smart Version



## Introduction

- Automatic switching based on motion and light level.
- Zero-crossing point operation helps protect the sensor against in-rush current.
- Super Compact size makes it suitable to fix within most luminaires.
- 4-pole press-in terminal (L, N, N, L'), easy assembly.
- Detection area, time delay and daylight threshold can be precisely set via DIP switch.
- Wide detection area, range up to 12m in diameter.

MC030S E is an innovative and active motion detector with HF system 5.8GHz. Motion can be detected through plastic, glass and thin non-metal materials.

The sensor supplies a simple energy-saving solution to use light only when and where you need it. It automatically switches on/off light based on motion and ambient light level. Can control all kinds of lamps, for example, halogen, fluorescent and LED lights. Compact size and small casing, suitable to fix within most luminaires. 4-pole press-in terminal (L, N, N, L'), very easy to install.

The high quality relay is particularly suitable for commercial use with switching power up to 400W for LEDs and fluorescent lamps and up to 800W for incandescent lamps.



Max. 6M




Zero-crossing  
point operation



Light Sensor



Hold Time  
5s~30min



Mounting Height  
6m Max.



Automatic  
On/Off



5 Years  
Guarantee


## ON -OFF Function

Motion sensor MC030S E + LED driver or ballast (Any brand)

MC030S E is an innovative motion sensor, switch on the light on detection of movement, and switch off after a hold time when there is no motion detected. As built-in daylight sensor can read brightness value, the sensor does not switch on the light if with sufficient natural light.



With sufficient light, the lamp doesn't switch on.

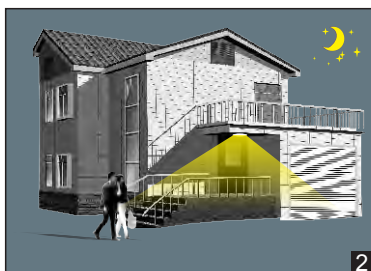


With insufficient ambient light, the sensor switches on the lamp when motion is detected.




After hold time, the sensor switches off the lamp when no motion is detected.


### Wiring scheme

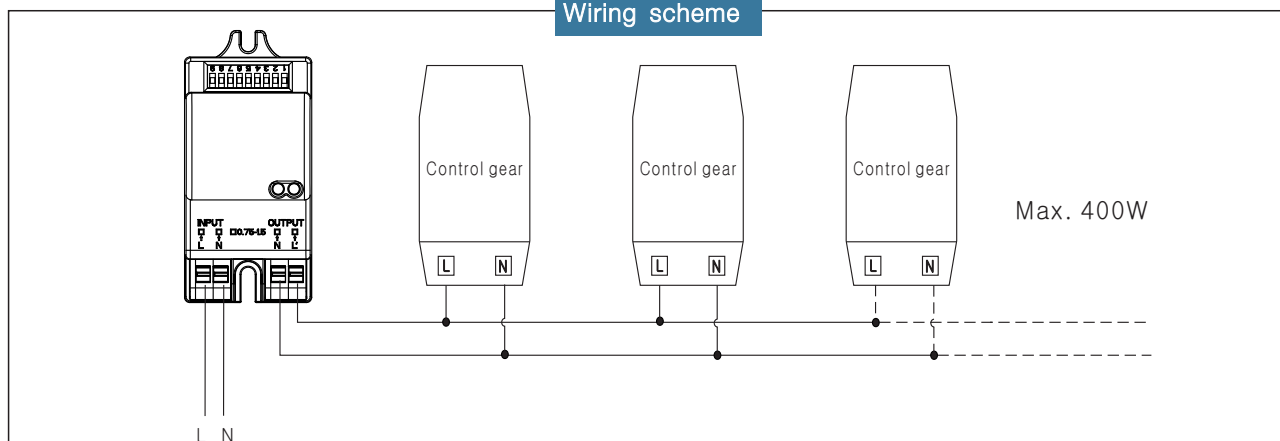


## Detection Pattern

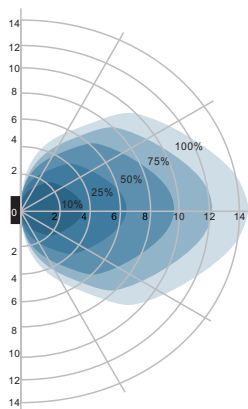

Wall mounting pattern (Unit: m)  
Suggested installation height: 1.5m



Ceiling mounting pattern (Unit: m)  
Suggested installation height: 3m

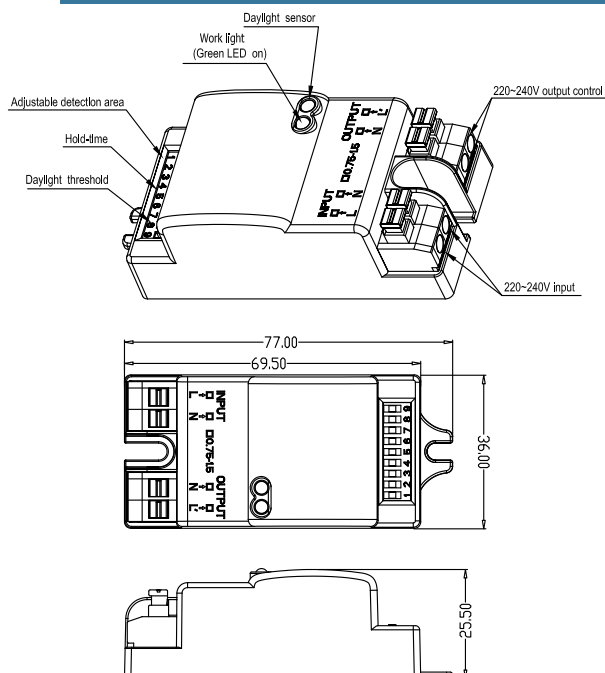

## MC030S E

Operating voltage	220~240Vac, 50Hz
Rated load	400W(inductive), 800W (resistive)
HF system	5.8GHz±75MHz, ISM wave band
Transmitting power	<0.5mW
Power consumption	≤0.5W(standby)
Detection zone	Max.(D x H): 12m x 6m
Detection sensitivity	10% / 25% / 50% / 75% / 100%
Hold time	5s / 30s / 90s / 3min / 20min / 30min
Daylight sensor	2lux / 10lux / 25lux / 50lux / Disable
Mounting height	6m Max.
Motion detection	0.5~3m/s
Detection angle	150°(wall installation) 360°(ceiling installation)
Operating temperature	-20℃ ~60℃
IP rating	IP20

## Setting

By selecting the combination on the DIP switch, sensor data can be precisely set for each specific application.

	1	2	3	
I	ON	ON	ON	100%
II	—	ON	ON	75%
III	ON	—	ON	50%
IV	—	—	ON	25%
V	—	—	—	10%

### Detection area

Detection area can be reduced by selecting the combination on the DIP switches to fit precisely each application.

	4	5	6	
I	ON	ON	ON	5s
II	—	ON	ON	30s
III	ON	—	ON	90s
IV	—	—	ON	3min
V	ON	ON	—	20min
VI	—	—	—	30min

### Hold time

Refers to the time period the lamp remains at 100% illumination after no motion detected.

	7	8	9	
I	ON	ON	ON	2lux
II	ON	ON	—	10lux
III	—	ON	—	25lux
IV	ON	—	—	50lux
V	—	—	—	Disable

### Daylight sensor

The sensor can be set to only allow the lamp to illuminate below a defined ambient brightness threshold.

When set to Disable mode, the daylight sensor will switch on the lamp when motion is detected regardless of ambient light level.

50lux, 25lux: twilight operation, 10lux, 2lux: darkness operation only.