





## UKKO HIGH BAY




### Technical Parameters

Product Specifications	100W	150W	200W	250W
Input Voltage	90-305VAC / 170-305VAC			
Power Frequency	50/60Hz			
CRI	Ra70/Ra80			
Beam Angle	T2/T3/T4			
IPRating	IP65			
Outlook Dimensions	403x456x232mm		524x579x258mm	
Luminaire Net Weight	5.3Kg		9.7Kg	
System Efficacy	120(±5%)LM/W(CCT=4000K)			
Power Factor	> 0.95			
Lifespan	≥ 100,000Hrs ( LM80@35℃ )			
Working Temperature	-30 ~ +70℃			
Working Humidity	15%~90%RH			
Storing Temperature	-40~+70℃			

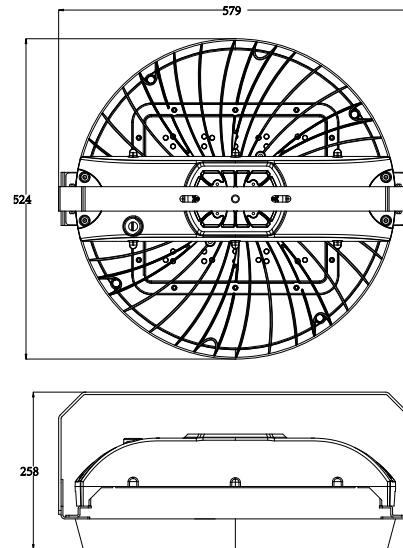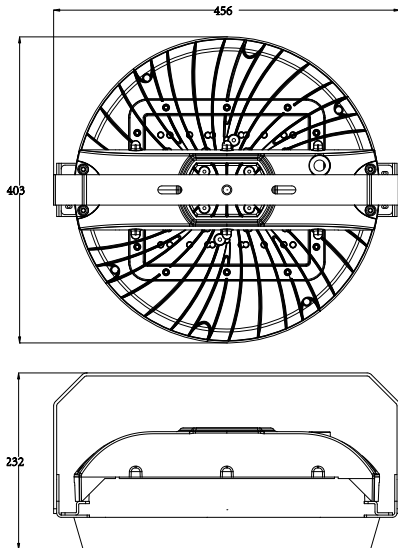

#### A. Class I Standard



#### A. Class II Standard




### Wiring :

1. Connect supply wires to luminaire wire leads per the wiring diagram using methods that comply with all applicable codes.
2. Turn power on.




## Mounting

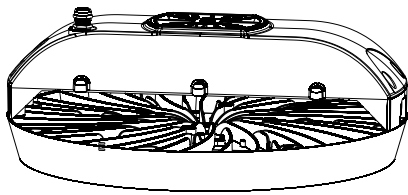


1

1- Take the lamp out of box

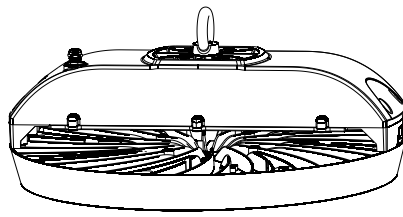

2


2- Screw the eyebolt at back of the driver base

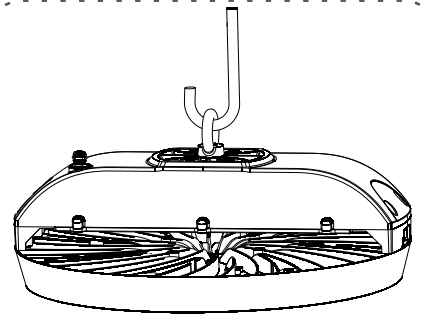

3

3- Hang the lamp to the hook with eyebolt


M10X25

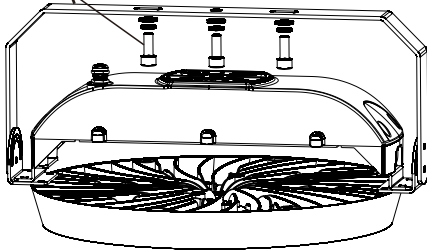

1

1- Install the bracket on the lamp, then fix the three M10x25 screws bullets and flat cushion at bracket holes accordingly which can make the lamp fix on the wall tightly.

2- Finish

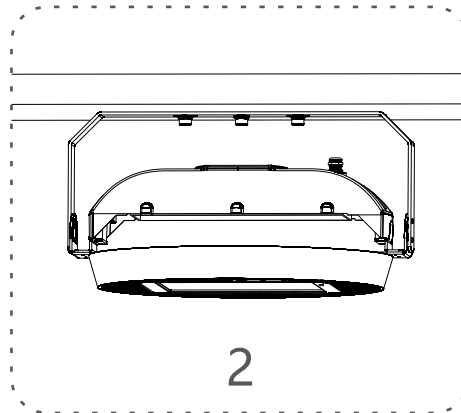

2

**The luminaire shall only be repaired or maintained by the manufacturer or his service agent or a qualified electrician.**



**Caution, risk of electric shock**



This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.