





🛠 Technical Parameters


CB


Œ

E

RoHS Compliance

Product Specifications	70/90/110	140/190
Input Voltage	AC100-240V	
Power Frequency	50/60Hz	
CRI	Ra 70/Ra 80	
IPRating	IP66	
Outlook Dimensions	662x300x125mm	777x330x125mm
Luminaire Net Weight	6.5Kg	8.5Kg
System Efficacy	130(±5%)LM/W(CCT=4000K)	
Power Factor	> 0.95	
Lifespan	≥100000Hrs (LM80@25°C)	
Working Temperature	-40 ~ +50°C	
Working Humidity	15%~90%RH	
Storing Temperature	-40~+70°C	
Installation caliber	Φ 48mm / Φ 60mm	

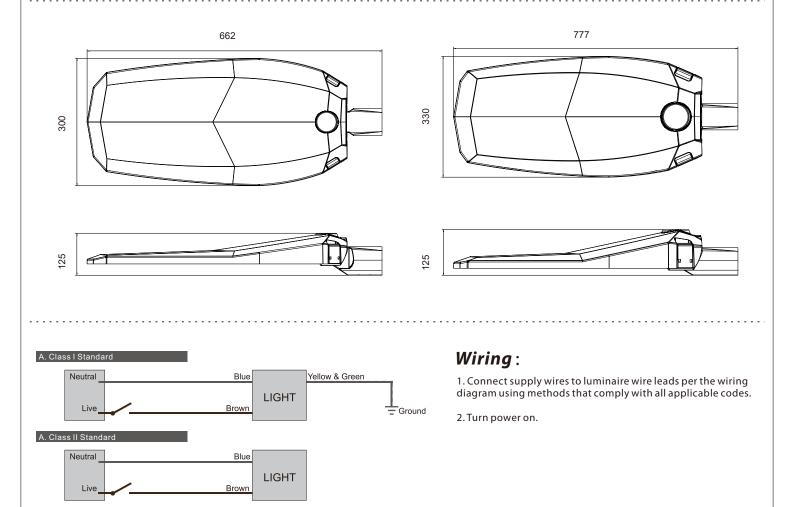

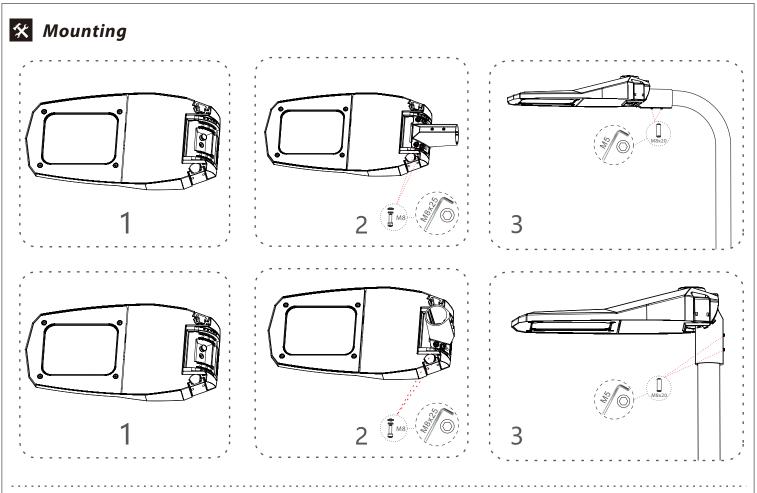

The luminaire shall only be repaired or maintained by the manufacturer or his service agent or a qualified electrician.



Caution, risk of electric shock

This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collec on systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.