


NORD

- LED edgelit panel for direct recessed mount or suspended mount with accessories.
- The flat, ready-to-install LED panel has been equipped with high-quality LEDs and uses microprismatic optics.
- The light guide and the matching diffuser material ensure an extremely homogeneous ceiling effect.
- With the optional accessories, both the pendant and the surface-mounted version are quick and easy to install.
- Beam characteristic of 106° or 88° (TPA).
- Lifetime of 50 000 hours.
- Operating temperature of -20°C to 40°C.
- Operating humidity of 0-70%.
- Light fitting protection: IP20



IP20

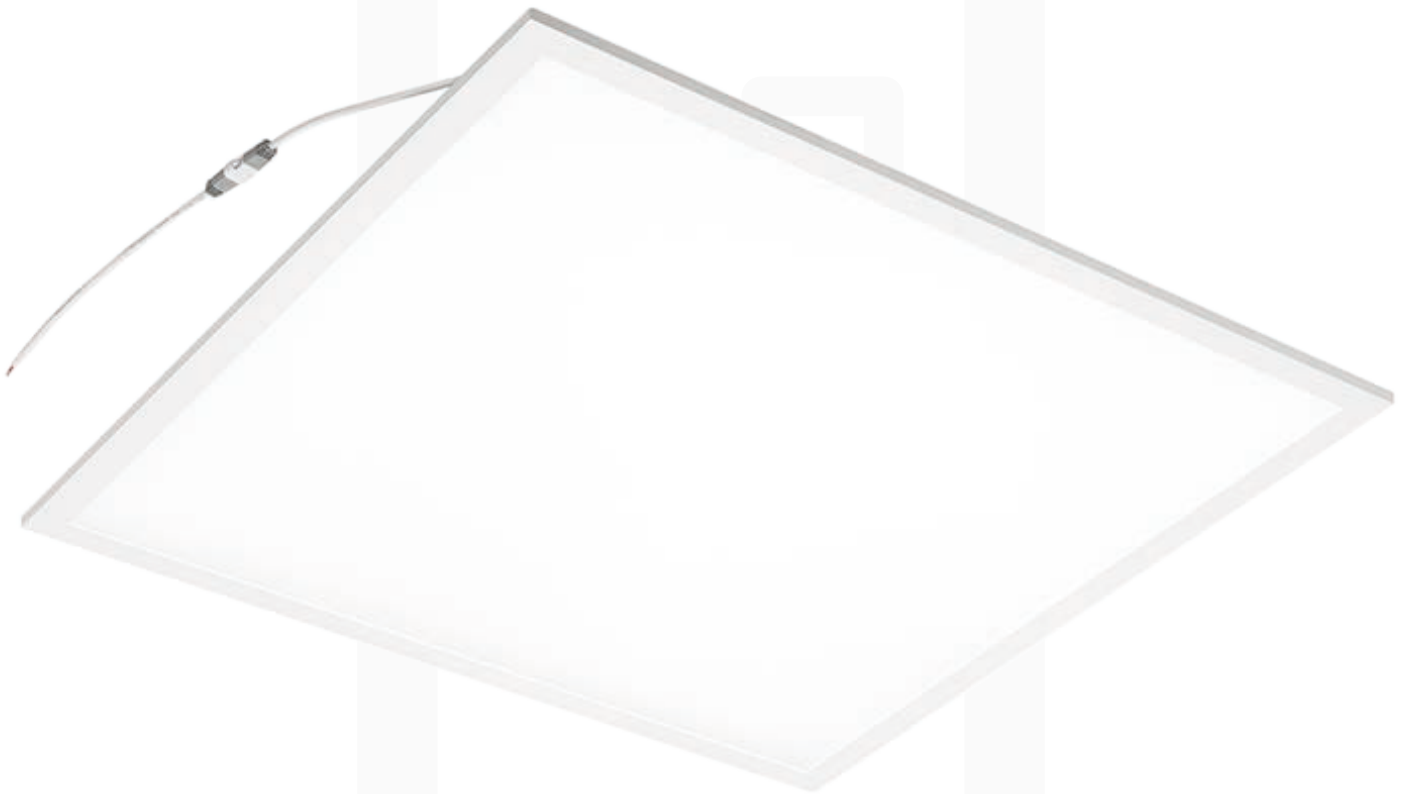

TECHNICAL INFORMATION

Light source: Integral LED module


Housing: Aluminium

Cover: Diffusor from PS or PC (TPA version)

Driver: Tridonics

Optics: Microprismatic PMMA

Type	Luminous flux netto (lm)	Power (W)	Efficacy (lm/W)	CCT (K)	CRI
NORD 600x600mm 2800lm 830 SNC	2710	24	115	3000	80
NORD 600x600mm 2800lm 840 SNC	2860	24	120	4000	80
NORD 600x600mm 2800lm 865 SNC	2860	24	120	6500	80
NORD 600x600mm 3800lm 830 SNC	3620	32	120	3000	80
NORD 600x600mm 3800lm 840 SNC	3870	32	120	4000	80
NORD 600x600mm 3800lm 865 SNC	3870	32	120	6500	80
NORD 600x600mm 3800lm 830 SNC TPA	3620	32	115	3000	80
NORD 600x600mm 3800lm 840 SNC TPA	3870	32	120	4000	80

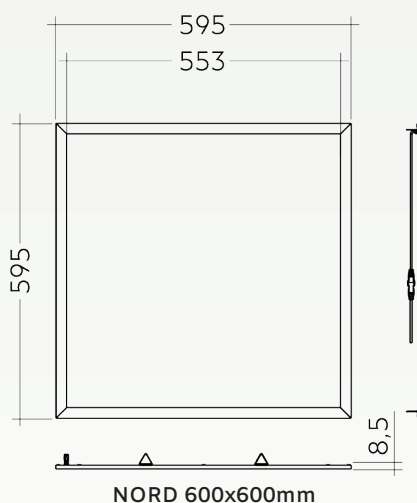

OPTIONAL FEATURES

- Suspension kit
- Surface mount kit
- DALI adapter: Digital dimmable driver