






VELA BASIC



Luminous flux	2600lm - 39,000lm
Correlated color temperature	4000K
Light source	Integral LED module
Housing	ADC 12 Aluminum
Cover	Tempered glass
Screws	304 stainless screws
Electrical	Class I
Input voltage	90-305VAC / 50-60Hz ; 170-305VAC / 50-60Hz
Surge protection	10KV or 20KV (optional)
External cable	Standard - 1m, other length available upon request
Lifetime	75,000 hours (at 25°C).
Operating temperature	-40° to 50°C.
Light fitting protection	IP66;IK08



VELA BASIC

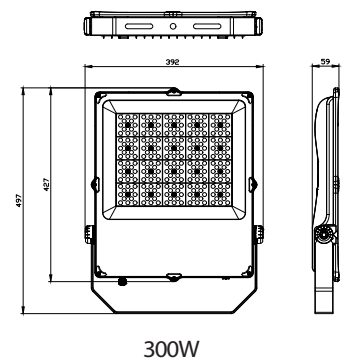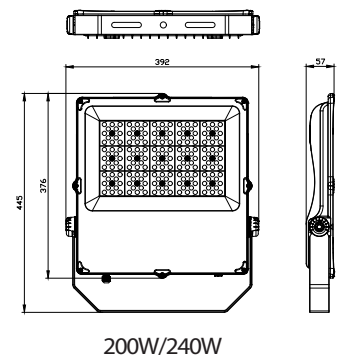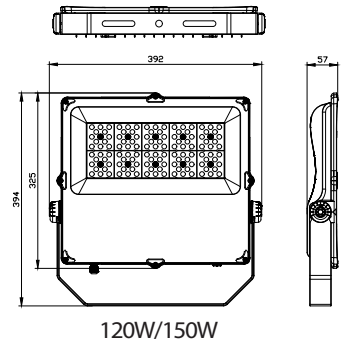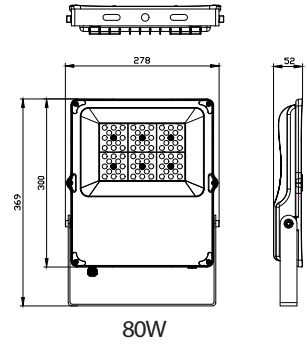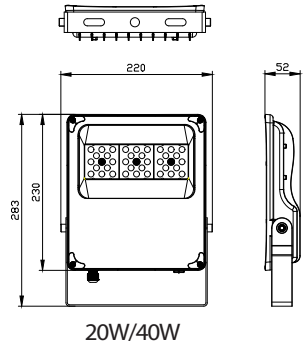

Name	Luminous flux netto (lm)	Power (W)	Efficacy (lm/W)	Standard CCT (K)
VELA BASIC 20	2600	20	130	4000
VELA BASIC 40	5200	40	130	4000
VELA BASIC 80	10400	80	130	4000
VELA BASIC 120	15600	120	130	4000
VELA BASIC 150	19500	150	130	4000
VELA BASIC 200	26000	200	130	4000
VELA BASIC 240	31200	240	130	4000
VELA BASIC 300	39000	300	130	4000