


UKKO HIGH BAY

UKKO LED High bay luminaire is designed to replace traditional up to 400W HID High bays.


Different sizes, mounting variants, lumen packages and optical systems make the UKKO High bay a multifunctional tool that provides the right solution for a variety of applications in industry, logistics and sports. The unique flat design means you have the flexibility to install by hook, pendant or bracket. There are several beam shapes to choose from and the high-rack optics are engineered to illuminate vertical planes with exceptionally high accuracy.



Type	Luminous flux netto (lm)	Power (W)	Efficacy (lm/W)	Standard CCT (K)
UKKO HIGH BAY 100	13000	100	130	4000
UKKO HIGH BAY 150	19500	150	130	4000
UKKO HIGH BAY 200	26000	200	130	4000
UKKO HIGH BAY 250	32500	250	130	4000

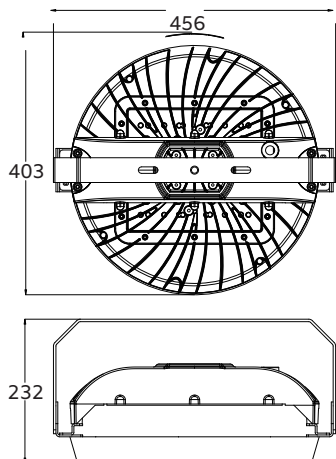

UKKO HIGH BAY 100/150

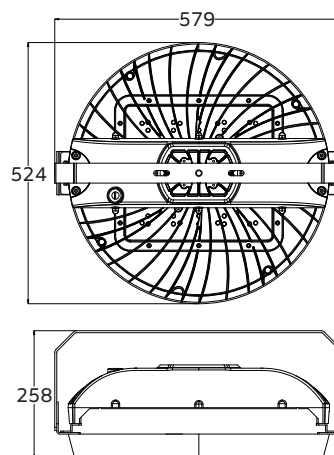

UKKO HIGH BAY 200/250

Data subject to change.

Website: www.PBLC.eu


E-mail: info@PBLC.eu

TECHNICAL INFORMATION

Luminous flux	13,000lm - 32,500lm
Correlated color temperature	3000K - 4000K
Light source	Integral LED module
Housing	ADC12 die-cast aluminium
Cover	5mm tempered glass / PMMA lens
Screws	304 stainless screws
Driver	Tridronics / Meanwell / Inventronics (Other brands available upon request)
Electrical	Class I
Input voltage	90-305VAC / 50-60Hz ; 170-305VAC / 50-60Hz
Surge protection	10KV or 20KV (optional)
Dimming	1-10V / PWM
External cable	0.5m (other length available upon request)
Lifetime	100,000 hours (at 25°C).
Operating temperature	-30° to 70°C.
Light fitting protection	IP65;IK08

OPTIONAL FEATURES

- Stirrup for wall/ceiling mounting
- Microwave sensor and remote control
- Motion detection

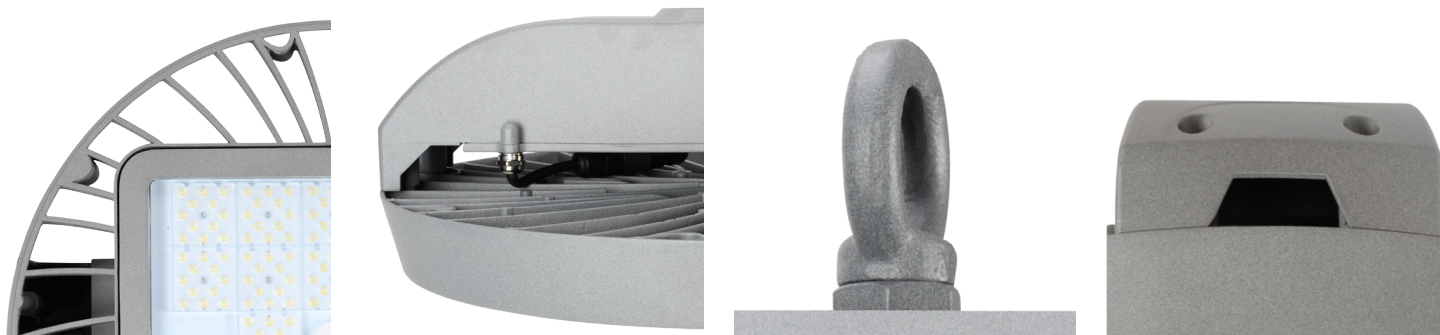

Data subject to change.

Website: www.PBLC.eu

E-mail: info@PBLC.eu